

FP-31-1000

Highlights


- Conduction cooled + water cooled
- Polypropylene dielectric
- Self-healing
- Operating frequency up to 100 KHz



Standard Capacitor Values

Rated Voltage Vrms	Nominal capacitance MFD at 1KHz	Max current Irms	Max power Kvar	Frequency KHz	Dimensions mm			Case Code	Terminal Style	Ordering Code
					B	H	L			
1000	5.00	1100	1000	32-39	106	106	124	G9	5D	SP000051000BD0G9005DK01
800	10.00	1250	1000	25-25	106	106	124	G9	5D	SP000100800BD0G9005DK01
700	15.00	1450	1000	22-22	106	106	124	G9	5D	SP000150700BD0G9005DK01
600	20.00	1700	1000	22-22	106	106	124	G9	5D	SP000200600BD0G9005DK01

Capacitor Drawing and Terminal Style

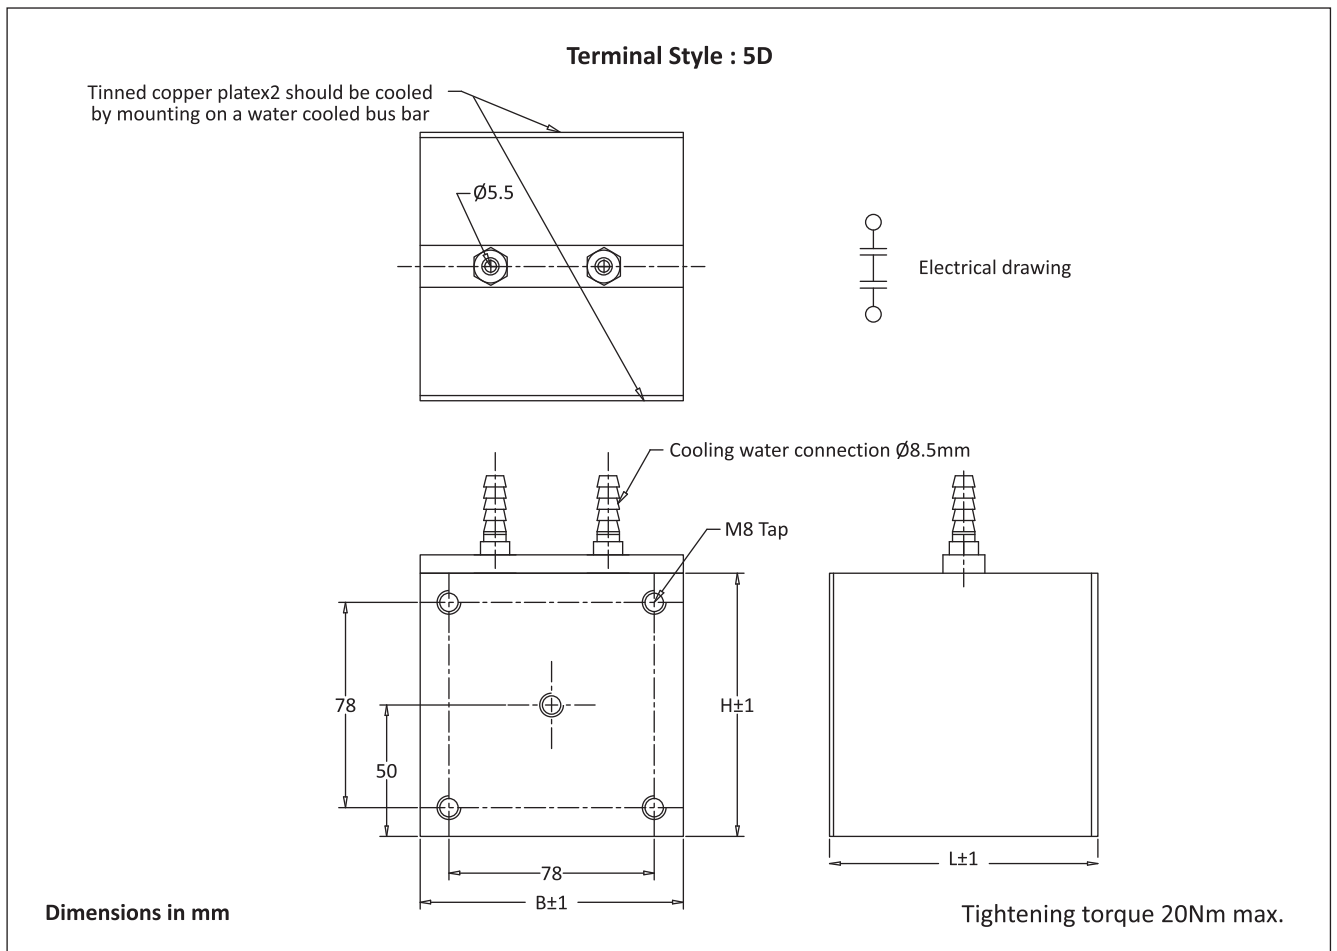

FP-31-1000

Frequency Derating

—◆— Voltage —■— Current —▲— Power

